



U BRACKETS

ONE SYSTEMS®

ONE SYSTEMS® offers a variety of “U” brackets. Each bracket is optimized for a particular ONE SYSTEMS enclosure. The enclosures are as follows:



- 112IM™
- 212CIM™
- 212IM™
- 115TW™
- 115TW-A™
- 112UM™
- 108IM-U™

The “U” bracket design allows for either vertical or horizontal wall of ceiling mounting of each specific enclosure. Each “U” bracket is designed for a high safety margin and is made of a stainless steel alloy that will allow both outdoor and indoor mounting. The table below lists relevant bracket dimensions for each “U” bracket.

An installation guide may be located on the ONE SYSTEMS web site (“ONE SYSTEMS U Bracket Installation”) at www.onesystems.com.

This installation manual should be carefully reviewed prior to installing the “U” brackets on any ONE SYSTEMS enclosures.

It is necessary that the installation and application of all suspended products conform to local and national codes. Installation of “U” brackets should only be attempted by an experienced professional that is familiar with local and national codes and safe suspension practices. ONE SYSTEMS also requires that the document “Rigging and Suspension of ONE SYSTEMS Products” be read and completely understood. This document is available at www.onesystems.com

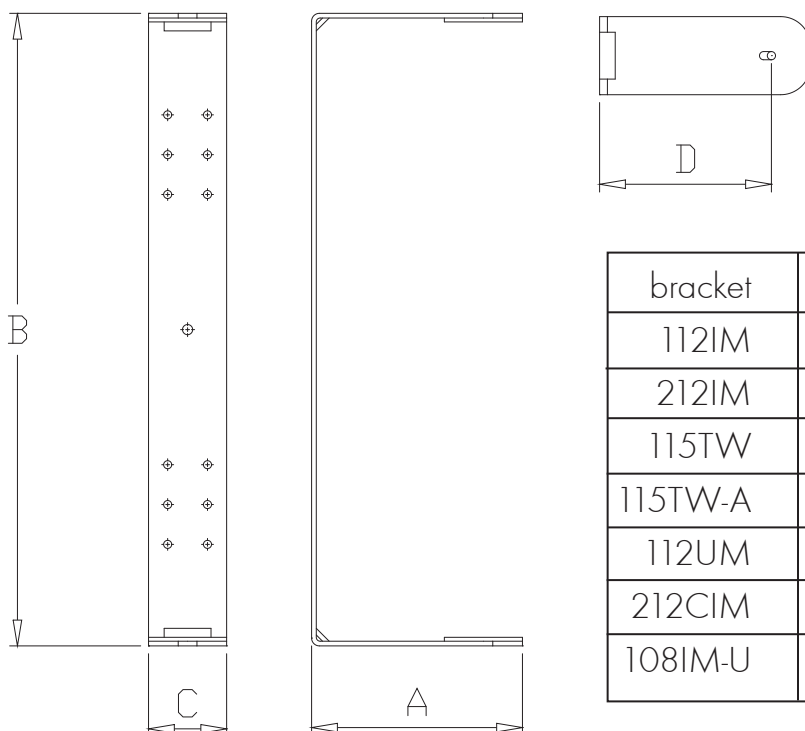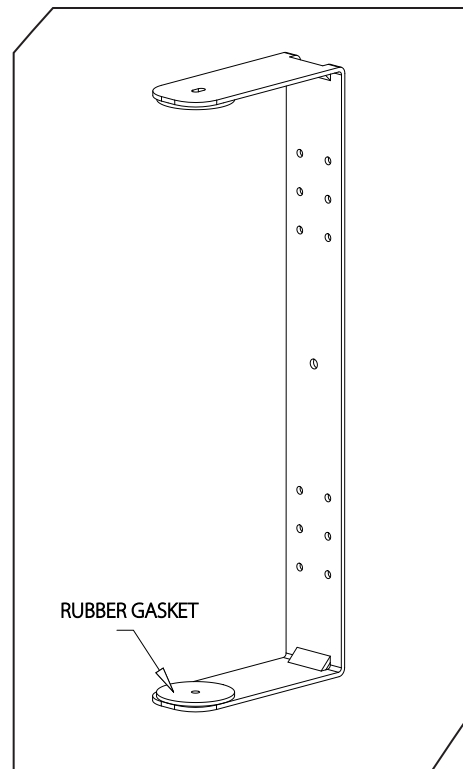

bracket	A	B	C	D
112IM	250	764	100	200
212IM	250	1116	100	200
115TW	270	810	100	220
115TW-A	305	810	100	255
112UM	240	635	100	190
212CIM	250	764	100	200
108IM-U	215	487	100	160